




UN8710A-13095-D

High-speed oil-free pattern template machine (rotary head)

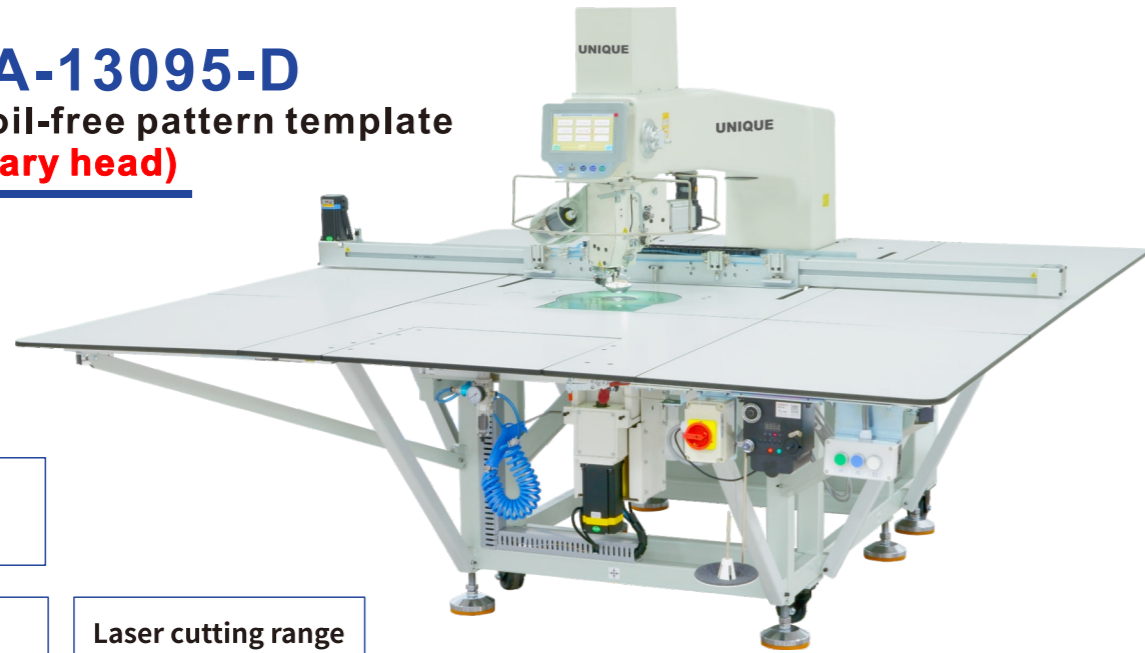

Work area
1300X950mm

Table size
2100X2457mm

Laser cutting range
1020x950mm


Product features

XY double synchronous belt transmission, through the RFID barcode to identify the pattern, automatically switch out the corresponding sewing program and quickly sew. Synchronous technology precisely controls the machine head, hook and feeding mechanism. It is suitable for down jackets and all kinds of woven and knitted fabrics. There is no reverse stitch in the sewing process, and 360° all-round high-quality sewing.


Function and configuration




No reverse stitch, 360 all round high quality sewing

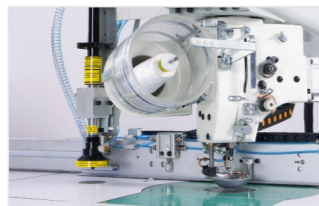

Laser function

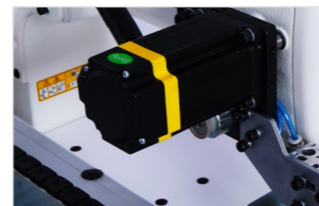



Motor driven middle presser foot

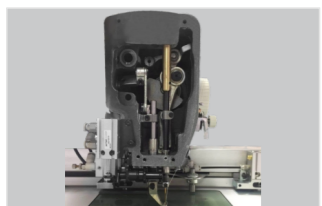

Dry technology machine head



Regarding pattern recognition, sewing data is automatically read through RFID/barcode

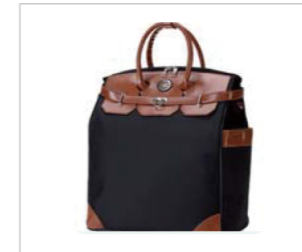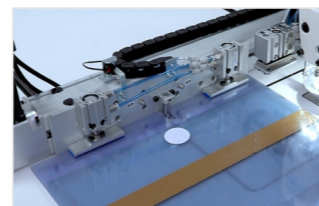

Technical parameter

Model	UN8710A-13095-D	UN8710A-13095-D/J
Sewing area	1300mm * 950mm	
XY drive mode	Dual synchronous tape transfer	
Stitch	Single needle 301 stitch	
Max. speed	3000r/min	
Stitch length	0.5-12.7mm	
Needle type	DB×1 (#8) #7~14	
Hook type	Double the full rotation of the shuttle	
Intermediate presser foot adjustment range	Lifting amount: 20mm/Stroke: Standard 4mm	
Program input method	USB	
Template holding mode	Pneumatic clip type or compression type	
Voltage	220V	
Air pressure	0.4-0.6MPa	
Power	750W	850W
G/N weight	677kg/788kg	739kg/850kg
Carton size	2050mm x 1380mm x 1875mm	

Optional parts	H	A/C	B	J	QX	ZM	XF	ZS
	Heavy material		A: Xinghuo control box C: Dahao control box	Pen	Laser	Rotary cutter	Automatic mould change	Suction device
Machine type								
UN8710A-13095-D	★	★	●	●	○	●	●	●

★ Optional ● Can be installed ○ Can not be installed

